


DivoLux® GD2

Description:

Coated Folding Box Board has top layer from bleached pulp. It is twice coated on top layer and once on back layer.

Printing methods:

Offset, flexographic, digital.

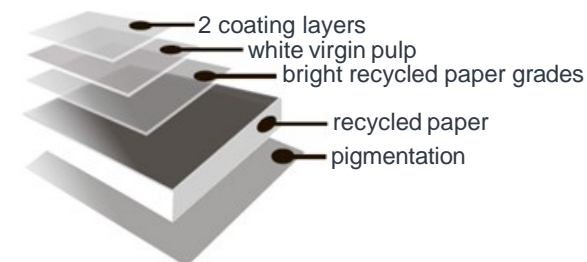

№	Property unit	Assortment range							Test standard	Tolerance
		280	300	320	350	380	400	450		
1	Grammage, g/m ²	280	300	320	350	380	400	450	DSTU 2297	+2/-4%
2	Thickness, μm	345	380	405	450	480	515	595	DSTU EN 20534	+3/-7%
3	Stiffness L&W (5°), mNm - CD - MD	5,8 18,9	6,8 24,3	8,7 28,6	11,0 35,0	14,6 48,1	17,5 56,3	23,3 69,9	DIN 53121	-15%
4	Brightness Top, %	86							DSTU 2570 ISO 2470-2	±2
5	Moisture, %	5,5-8,5							DSTU GOST ISO 287	-
6	Surface Smoothness, mcm	not more 4,5							ISO 8791-4	-
7	Water Absorption Top, gsm: - Back side	not less 100							DSTU 3549	-
8	Bulk, cm ³ /g	1,23	1,27	1,27	1,29	1,26	1,29	1,32	DSTU EN 20534	-