


LIN GD3

Description:

Recycled Board has top layer from white recycled paper. It is twice coated on top layer and once on back layer.

Printing methods:

Offset, flexographic, digital.

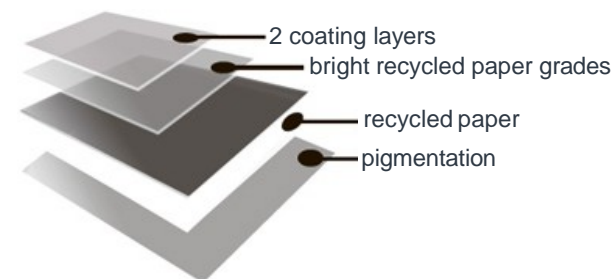

№	Property unit	Assortment range			Test standard	Tolerance
		155	180	200		
1	Grammage, g/m ²	155	180	200	DSTU 2297	±3%
2	Burst strength, kPa	300	350	360	DSTU ISO 2759	-10%
3	Torsion of cardboard, IrrM - on the upper side max. value, - on the lower side		10 40		GOST 13525.21	-
4	Brightness Top, %		84		DSTU 2570 ISO 2470-2	±2%
5	Moisture, %		5,0-8,0		DSTU GOST ISO 287	-
6	Surface Smoothness, mcm		not more 5,0		ISO 8791-4	-
7	Water Absorption Top, gsm: - Top - Back side		not more 100		DSTU 3549	-
8	Short-distance compression force transverse direction (SCT CD), kN / m	2,3	2,5	2,7	ISO 9895	-0,3