


DivoPrint® GD3

Description:

Recycled Board has top layer from white recycled paper. It is twice coated on top layer and once on back layer.

Printing methods:

Offset, flexographic, digital.

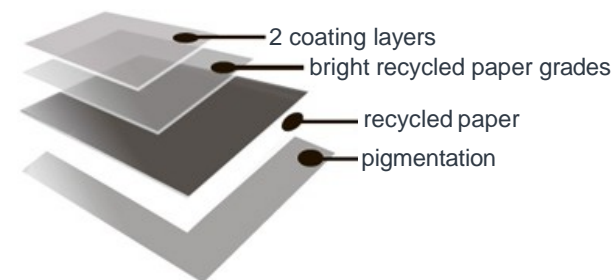

№	Property unit	Assortment range									Test standard	Tolerance
		230	250	280	300	320	350	380	400	450		
1	Grammage, g/m ²	230	250	280	300	320	350	380	400	450	DSTU 2297	+2/-4%
2	Thickness, μm	280	310	350	375	412	450	490	515	580	DSTU EN 20534	+3/-7%
3	Stiffness L&W (5°), mNm - CD - MD	2,7	3,7	5,3	5,7	8,0	11,2	15,5	19,4	25,2	DIN 53121	-15%
		8,7	11,7	17,5	18,6	25,5	34,0	43,2	54,4	68,0		
4	Brightness Top, %	82									DSTU 2570 ISO 2470-2	±2%
5	Moisture, %	5,5-8,5									DSTU GOST ISO 287	-
6	Surface Smoothness, mcm	not more 5,0									ISO 8791-4	-
7	Water Absorption Top, gsm: - Back side	not less 100									DSTU 3549	-
8	Bulk, cm ³ /g	1,22	1,24	1,25	1,25	1,29	1,29	1,29	1,29	1,29	DSTU EN 20534	-