


## GT2

**Description:**

Coated Folding Box Board has top layer from bleached pulp and back layer from white recycled paper. It is twice coated on top layer and once on back layer.

**Printing methods:**

Offset, flexographic, digital.

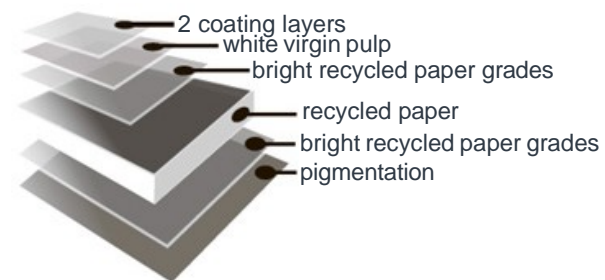

№	Property unit	Assortment range			Test standard	Tolerance
		300	400	450		
1	Grammage, g/m <sup>2</sup>	300	400	450	DSTU 2297	+2/-4%
2	Thickness, μm	365	500	560	DSTU EN 20534	+3/-7%
3	Stiffness L&W (5°), mNm - CD - MD	6,8 20,4	18,4 53,4	23,3 72,0	DIN 53121	-15%
4	Brightness Top, %, (D65/2)	86			DSTU 2570 ISO 2470-2	±2
5	Moisture, %	6,0-8,5			DSTU GOST ISO 287	-
6	Surface Smoothness, mcm	not more 4,5			ISO 8791-4	-
7	Water Absorption, back side, gsm	not less 100			DSTU 3549 DSTU EN ISO 535	-
8	Bulk, cm <sup>3</sup> /g	1,22	1,25	1,24	DSTU EN 20534	-